
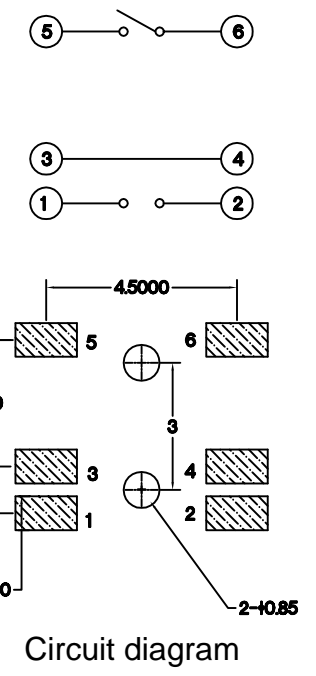
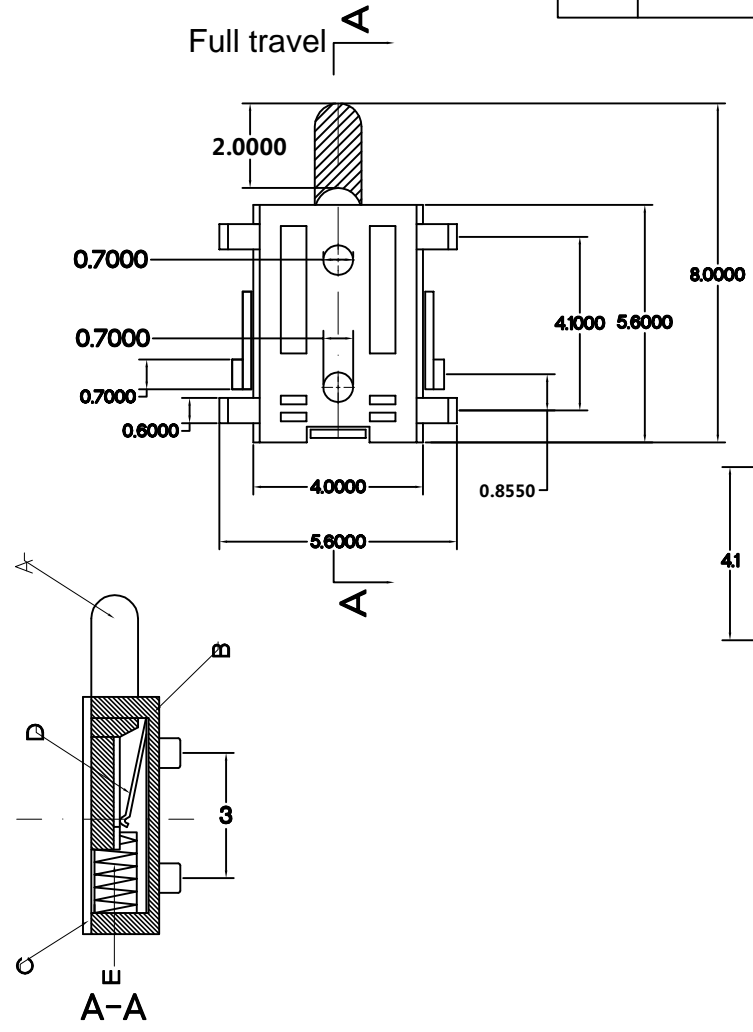
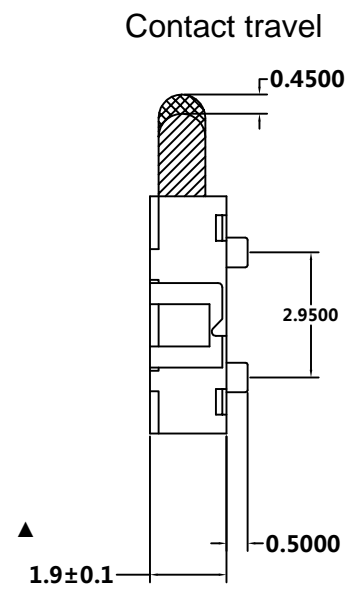


6	7	8
标记 MARK.	ECN编号/变更内容 ECN NO/DEFINITION	日期 DATE
		修改 REVISE
		核准 APPROVE

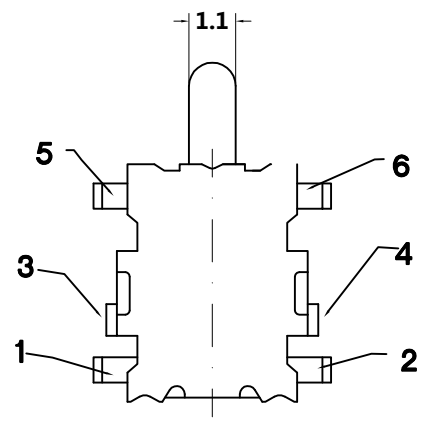

	Specification
Rating :	DC12V 0.1A
Insulation Resistance :	≥100MΩ 100V DC
Dielectric voltage proof :	AC100V 50Hz/1min
Operation life :	50,000 cycles Min
Operating Temperature :	-10℃ ~ +60℃
Contact Resistance :	≤200mΩ Max
Travel :	0.45±0.15mm
Operating Force :	100gf ± 20gf

编号	部件名称	材料名称	数量	备注
E	Spring	SUS 304	1	
D	Contact	Qsn6.5-01	1	
C	Cover	H62	1	
B	Base	LCP	1	
A	Button	LCP	1	

GENERAL TOLERANCE				单位: UNIT	mm	产品名称 Product Title	Tact switch	
X.	±0.2	X.	±1°	材质 MATERIAL		产品系列 Product series		
.X	±0.1	.X°	±0.5°	重量 WT.		产品编码 MODEL NO		
.XX	±0.05	.XX°	±0.3°	图号 DWG NO.		Gangyuan Electronics Co., Ltd		
.XXX	±0.02	.XXX°	—	视图 VIEW	比例 SCALE			1 : 1
设计 DESIGN		审核 CHECKED		版本 REV.	A0			
批准 APPROVE		日期				张数	第 页	