

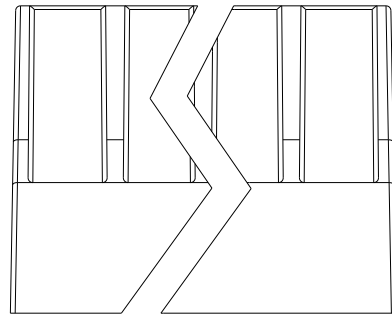



2P



4-8P

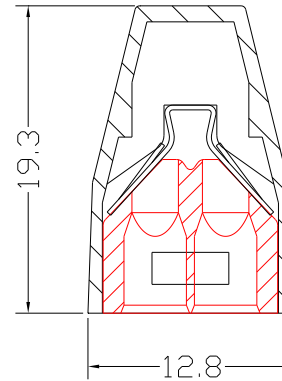

2P

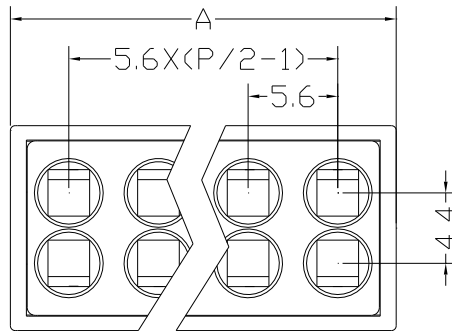

4-8P

400V 24A 2.5mm²

Poles: 2P/4P/6P/8P

Pitch: 5.6mm

Materials

Housing: PA66 (UL 94V-0)

Clamping: Stainless steel

Solder Pin: Brass, Tin Plated

Poles	2P	4P	6P	8P
A	9.2	13.1	18.6	24.1

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2°
				.x ±0.1	.x" ±1°
				.xx ±0.05	.xx" ±0.5°
				.xxx ±0.01	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.			图名/Title	文件编号/File No.	
			XY608产品图	页序/Sheet	
			备注/Remark		单位/Units: mm