


序号/RevNo.	名称/Title	文件编号/File No.
1	128塑件主体	QJ/XYT-11147
2	128塑件(盖)	QJ/XYT-11148
3	128端子	QJ/XYT-11149

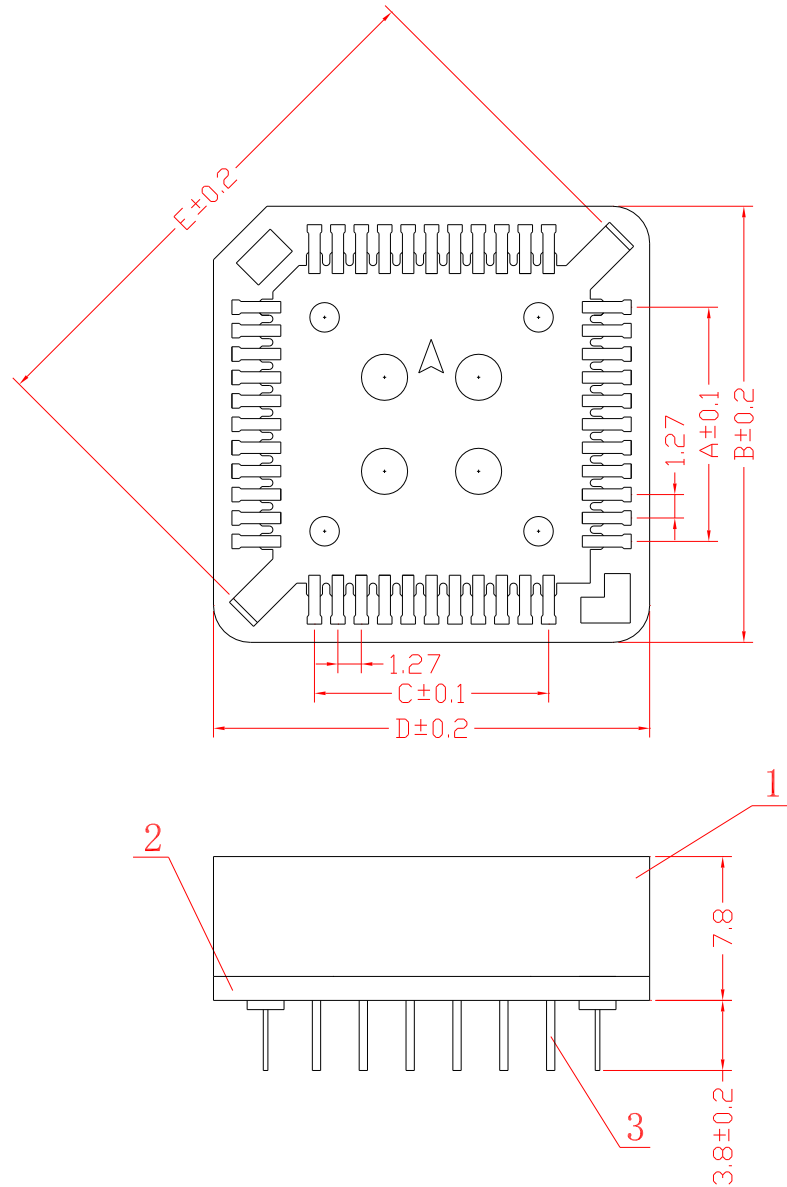

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Brass or phosphor bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B	C	D	E
28	7.62	18.3	7.62	18.3	21.0
32	10.16	21.2	7.62	18.7	23.4
44	12.7	23.5	12.7	23.5	29.0
52	15.24	26.0	15.24	26.0	33.0
68	20.32	31.0	20.32	31.0	38.5
84	25.4	36.9	25.4	36.9	46.2

要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2°
				.x ±0.1	.x' ±1°
				.xx ±0.05	.xx' ±0.5°
				.xxx ±0.01	
图名/Title				文件编号/File No.	
128产品图				QJ/XYT-12059	
备注/Remark				页序/Sheet	
				单位/Units: mm	