

序号/RevNo.	名称/Title	文件编号/File No.
1	176下铁壳	QJ/XYT-11210
2	176上铁壳	QJ/XYT-11211
3	176 后盖	QJ/XYT-11214
4	176塑料件主体	QJ/XYT-11213
5	176端子	QJ/XYT-11212

Specifications:


Contact Resistance: 10mΩ max.at DC 100 mA  
 Insulator Resistance: 500MΩ min.at DC 500V  
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

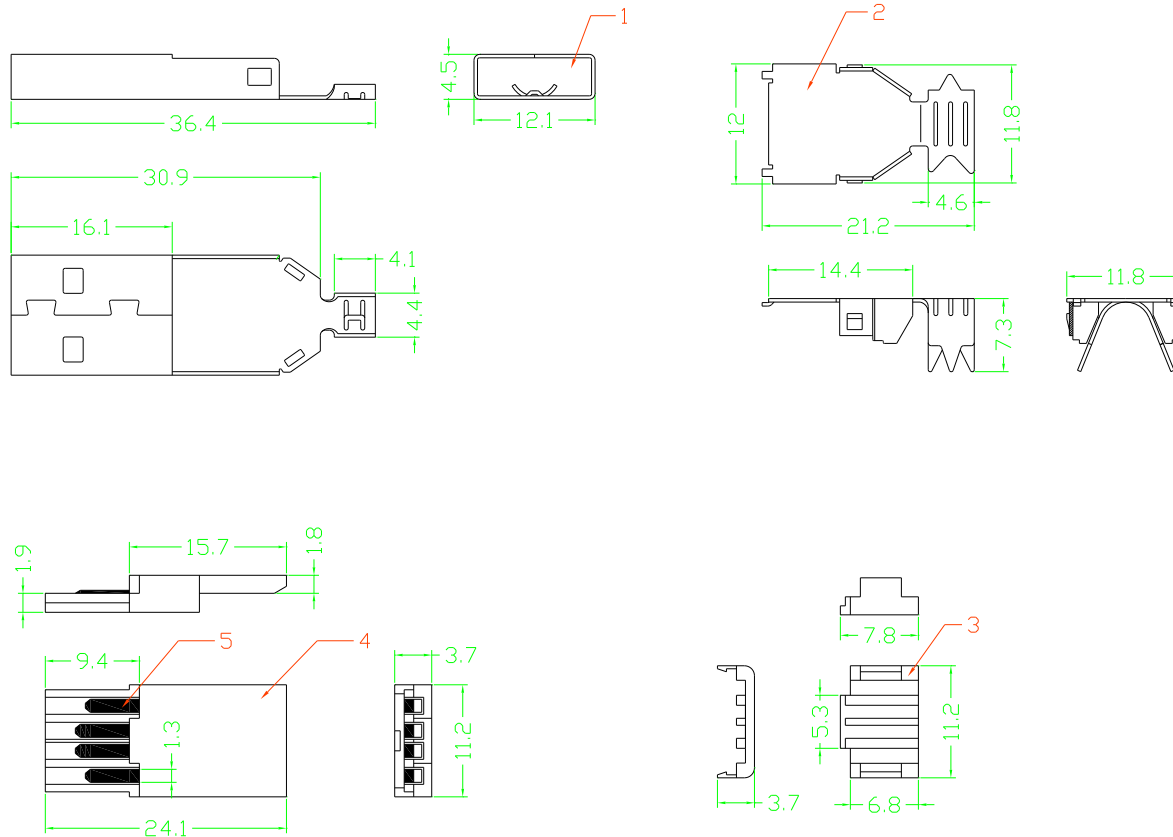

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2°
				.x ±0.1	.x' ±1°
				.xx ±0.05	.xx' ±0.5°
				.xxx ±0.01	
				单位/units: mm	